DAEYOUNG ELECTRIC

SMD MAGNETIC BUZZER

MODEL : SMT-5030D

FEATURES

- externally drive
- SMD type
- household appliances

SPECIFICATIONS

PARAMETER	UNITS	VALUE
Rated Voltage	Vp-p	3
Operating Voltage	Vp-p	2~4
Resonance Frequency	Hz	4,000
Coil Resistance	Ω	12±3
Sound pressure level at 10cm	dB	≥78
Current Consumption	mA	≤100
Operating Temperature	℃	-30~+70
Storage Temperature	℃	-40~+85
Housing Material		LCP
RoHS		Yes
Applying rated voltage (Resonance frequency, 1/2 duty, Square wave) Tset Basic State : Temp(20±2℃), Humidity(40~70%RH), Air pressure(860~1060hPa)		

DIMENSIONS
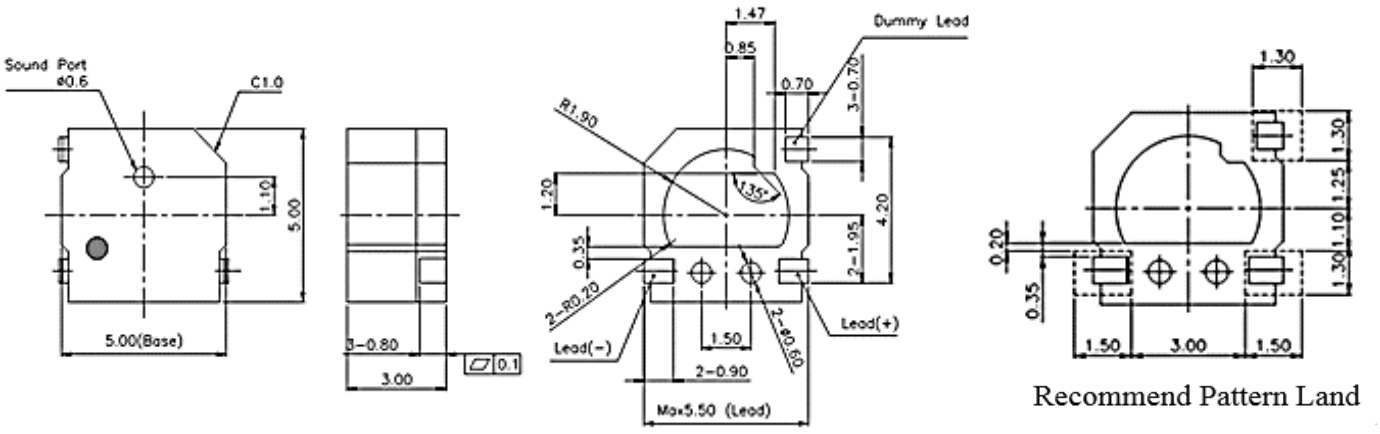
Tolerance: ±0.5mm Except Specified