


Endosulfan Analysis

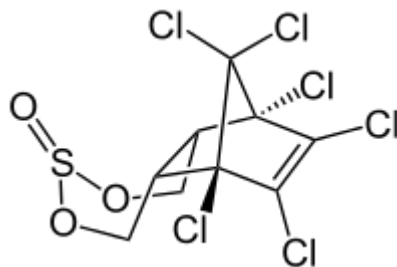

1. Analytical Condition

YL 6500 Series

Oven : 80°C (2 min)-10 °C/min-280 °C(10 min)

Column : DB-5MS (30m*0.25mm*0.25um)

Carrier gas : N₂, 1.0 ml/min (Split ratio 10:1)

Injector : Capillary 280°C

Detector : ECD 300°C(Mkup 22ml/min)

2. Chromatogram

